


SALSUB

SUBMERSIBLE BOREHOLE PUMPS

SB 24 SERIES


Pump Specifications

Model	Motor		Weight (kg)			Length (mm)		
	kW	Amps	WET END	MOTOR	TOTAL	WET END	MOTOR	TOTAL
SB 24-2-220	2.25	16.00	10	18	28	290	460	750
SB 24-2-380	2.25	5.80	10	13	23	290	355	645
SB 24-3-380	3.75	9.00	12	22	34	340	550	890
SB 24-4-380	5.60	13.50	14	29	43	390	695	1085
SB 24-5-380	5.60	13.50	16	29	45	445	695	1140
SB 24-6-380	7.50	16.30	19	49	68	515	645	1160
SB 24-7-220	7.50	16.30	21	49	70	565	645	1210
SB 24-8-380	11.20	24.00	23	55	78	625	710	1335
SB 24-9-380	11.20	24.00	25	55	80	675	710	1385
SB 24-10-380	11.20	24.00	33	55	88	780	710	1490
SB 24-11-380	15.00	32.00	35	63	98	785	775	1560
SB 24-12-380	15.00	32.00	37	63	100	840	775	1615
SB 24-13-380	15.00	32.00	40	63	103	895	775	1670
SB 24-14-380	15.00	32.00	43	63	106	950	775	1725
SB 24-15-380	18.60	38.00	46	68	114	1000	840	1840
SB 24-16-380	18.60	38.00	49	68	117	1055	840	1895
SB 24-17-380	18.60	38.00	52	68	120	1110	840	1950

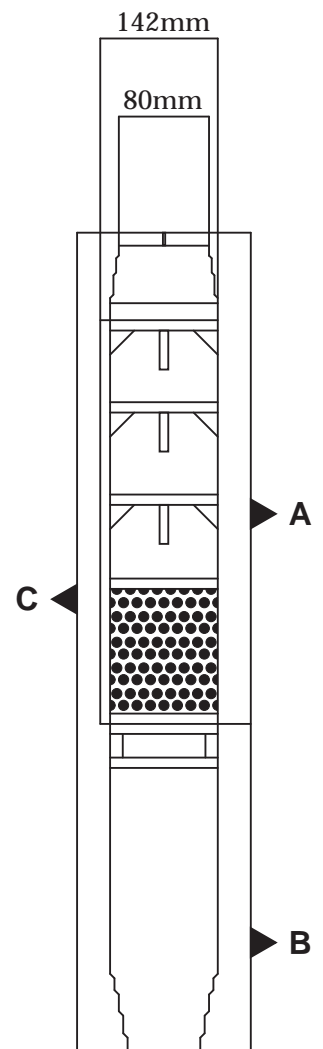


SALSUB

SUBMERSIBLE BOREHOLE PUMPS

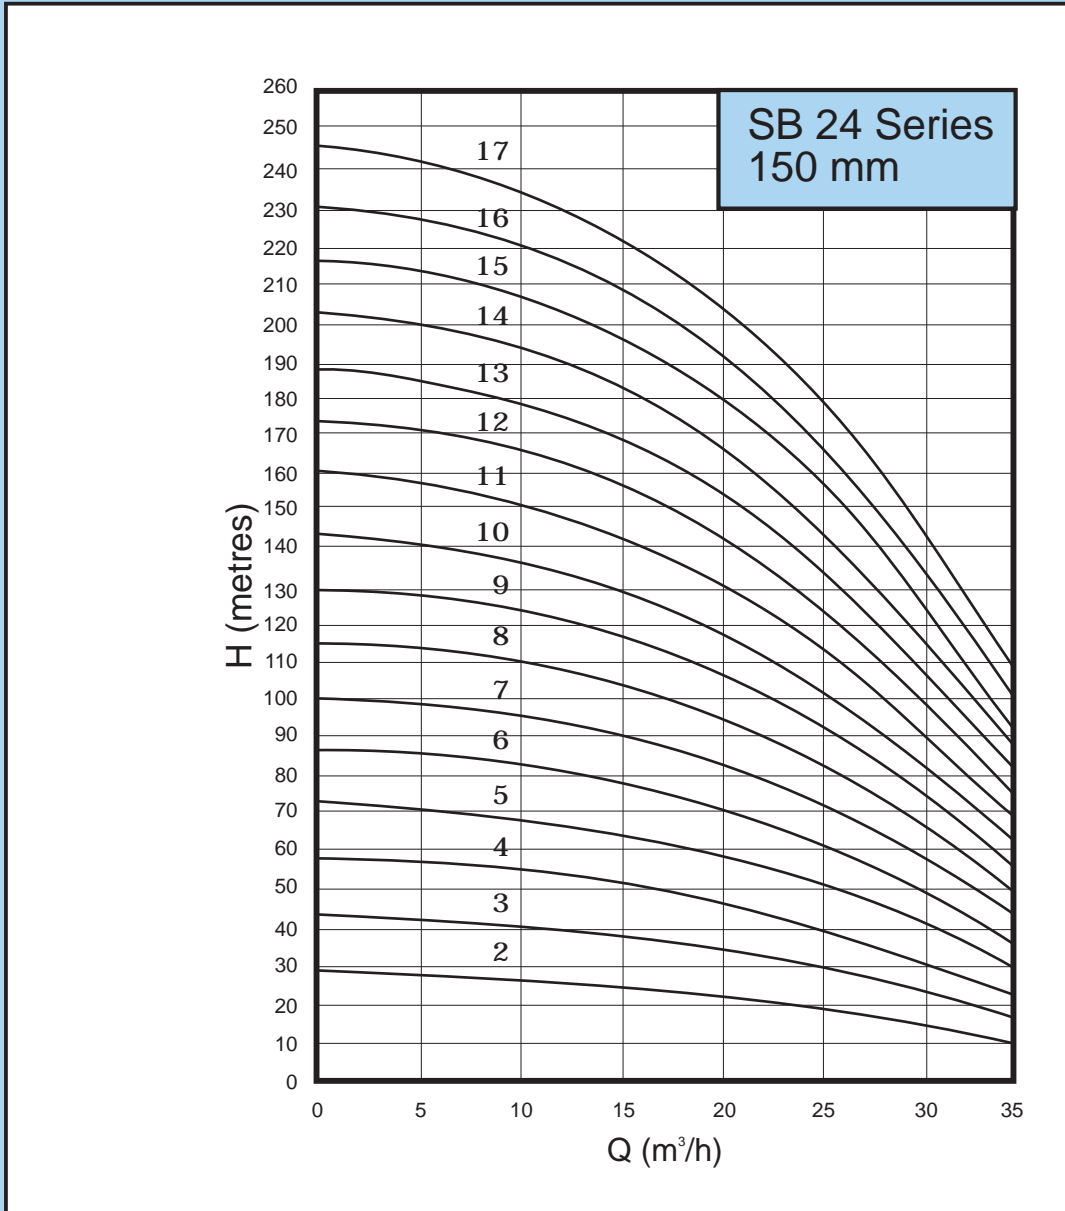

Stages	kW
17 16 15	18.60
14 13 12 11	15.00
10 9 8	11.20
7 6	7.50
5 4	5.60
3	3.75
2	2.25

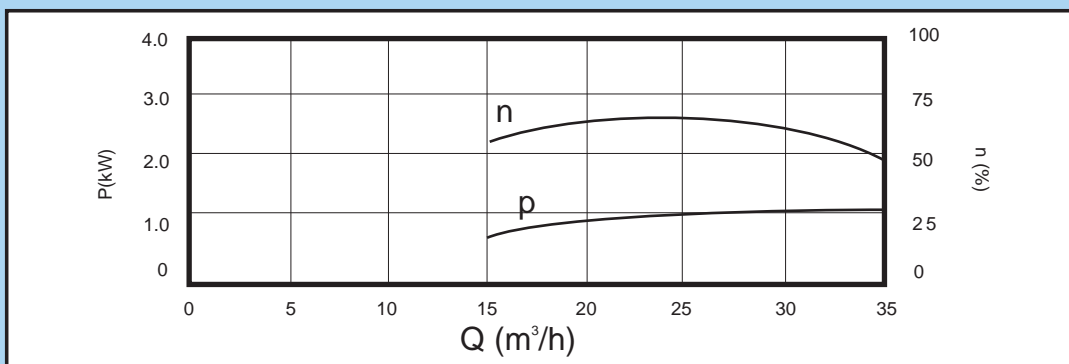

Maximum kW per stage: 1.10kW
Maximum efficiency: 70%